



N3535X-INxx Series

High Power Infrared LED

Introduction

The N3535X-INxx LED from TSLC brings industry leading technology to the infrared applications market with its high reliability and performance. With a ceramic substrate and a 140/90/65/30 degree view angle primary lens, the N3535X-INxx LED is a perfect solution for security cameras, surveillance systems, machine vision and general purpose IR applications.



Table of Contents

Characteristics	1
Mechanical Dimensions	5
Recommended Solder Pad Design.....	8
Relative Spectral Power Distribution.....	9
Typical Spatial Radiation Pattern	9
Typical Forward L-I Characteristics	10
Typical Forward I-V Characteristics	10
Recommended Soldering Profile	11
Thermal Design.....	12
Packing information.....	13

RoHS Compliant

Characteristics

Absolute Maximum Ratings (T_j = 25°C)

Parameter	Rating
	IR Series
DC Forward Current (mA)	1000 mA
LED Junction Temperature	115°C
LED Operating Temperature	-40°C~85°C
Storage Temperature	-40°C~115°C
Soldering Temperature	Max. 260°C / Max. 10sec. (JEDEC 020)
ESD Sensitivity	2,000 V HBM (JESD-22A-114-B)
Reverse Voltage	Not designed to be driven in reverse bias (VR ≤ 5V)
Preconditioning	Acc. to JEDEC Level 1

Product Name

N 3535 X – IN x x

1 2~5 6 7~8 9 10

Code 1: Substrate composition, N: Ceramic AlN

Code 2.3.4.5: Package size, 3535: 3.5*3.5mm

Code 6: X: Product Class, IR (>700nm)

Code 7.8: Wavelength Class, IN: IR (840~870nm)

Code 9: Lens type, L: 140 degree, A: 90 degree, F: 65 degree, S: 30 degree

Code 10: Lens version

General Characteristics at 700mA

Part Number	Color	Peak Wavelength Wp		$2\theta_{1/2}$	Temperature Coefficient of Vf (mV/°C)	Thermal Resistance Junction to Pad (°C/W)
		Min	Max		$\Delta V_f / \Delta T_J$	$R\theta_{J-L}$
N3535X-INLx	Ix0	840	870	140	-2~-4	4.4
N3535X-INAx	Ix0	840	870	90	-2~-4	4.4
N3535X-INFx	Ix0	840	870	65	-2~-4	4.4
N3535X-INSx	Ix0	840	870	30	-2~-4	4.4

Notes:

1. The peak wavelength is measured with an accuracy of $\pm 1\text{nm}$
2. All values stated are subject to the limits and set up of TSLC's testers. All other measurement data are defined as long-term production mean values and are only given for reference.
3. A critical component is a component used in a life-support device or system whose failure can reasonably be expected to cause the failure of that life-support device or system, or to affect its safety or effectiveness of that device or system. Life support devices or systems are intended (i) to be implanted in the human body, or (ii) to support and/or maintain and sustain human life. If they fail, it is reasonable to assume that the health of the user may be endangered. Components used as a critical component must be approved in writing by TSLC Corporation.



Radiometric Power and Forward Voltage ($T_j = 25^\circ\text{C}$)

D Series

Part Number	Color	Performance at Test Current (700mA)					Performance at 1000mA
		Group	Radiometric Power (mW)		Vf		*Calculated Minimum Radiometric Power
			Min	Max	Min	Max	mW
N3535X-INLx (beam angle 140°)	Ix0 (840-870nm)	NF3	700	750	2.8	3.4	1015
		NF4	750	800	2.8	3.4	1085
		NF5	800	850	2.8	3.4	1155
		NG1	850	900	2.8	3.4	1225
		NG2	900	950	2.8	3.4	1295
		NG3	950	1000	2.8	3.4	1365
N3535X-INAx (beam angle 90°)	Ix0 (840-870nm)	NF2	650	700	2.8	3.4	945
		NF3	700	750	2.8	3.4	1015
		NF4	750	800	2.8	3.4	1085
		NF5	800	850	2.8	3.4	1155
		NG1	850	900	2.8	3.4	1225
		NG2	900	950	2.8	3.4	1295
		NG3	950	1000	2.8	3.4	1365
N3535X-INFx (beam angle 65°)	Ix0 (840-870nm)	NF1	600	650	2.8	3.4	875
		NF2	650	700	2.8	3.4	945
		NF3	700	750	2.8	3.4	1015
		NF4	750	800	2.8	3.4	1085
		NF5	800	850	2.8	3.4	1155
		NG1	850	900	2.8	3.4	1225

Note: 1. Radiometric power is measured with an accuracy of $\pm 10\%$

2. The forward voltage is measured with an accuracy of $\pm 0.2\text{V}$

* Calculated values are for reference only.

B Series

Part Number	Color	Performance at Test Current (700mA)					Performance at 1000mA
		Group	Radiometric Power (mW)		Vf		*Calculated Minimum Radiometric Power
			Min	Max	Min	Max	mW
N3535X-INLx (beam angle 140°)	Ix0 (840-870nm)	NE5	560	600	1.4	2.2	812
		NF1	600	650	1.4	2.2	868
		NF2	650	700	1.4	2.2	924
		NF3	700	750	1.4	2.2	980
		NF4	750	800	1.4	2.2	1036
N3535X-INAx (beam angle 90°)	Ix0 (840-870nm)	NE4	520	560	1.4	2.2	756
		NE5	560	600	1.4	2.2	812
		NF1	600	650	1.4	2.2	868
		NF2	650	700	1.4	2.2	924
		NF3	700	750	1.4	2.2	980
N3535X-INFx (beam angle 65°)	Ix0 (840-870nm)	NE4	520	560	1.4	2.2	756
		NE5	560	600	1.4	2.2	812
		NF1	600	650	1.4	2.2	868
		NF2	650	700	1.4	2.2	924
		NF3	700	750	1.4	2.2	980
N3535X-INSx (beam angle 30°)	Ix0 (840-870nm)	NE2	440	480	1.4	2.2	644
		NE3	480	520	1.4	2.2	700
		NE4	520	560	1.4	2.2	756


Note: 1. Radiometric power is measured with an accuracy of $\pm 10\%$

2. The forward voltage is measured with an accuracy of $\pm 0.2V$

* Calculated values are for reference only.

Mechanical Dimensions






N3535X-INLx (beam angle 140°)

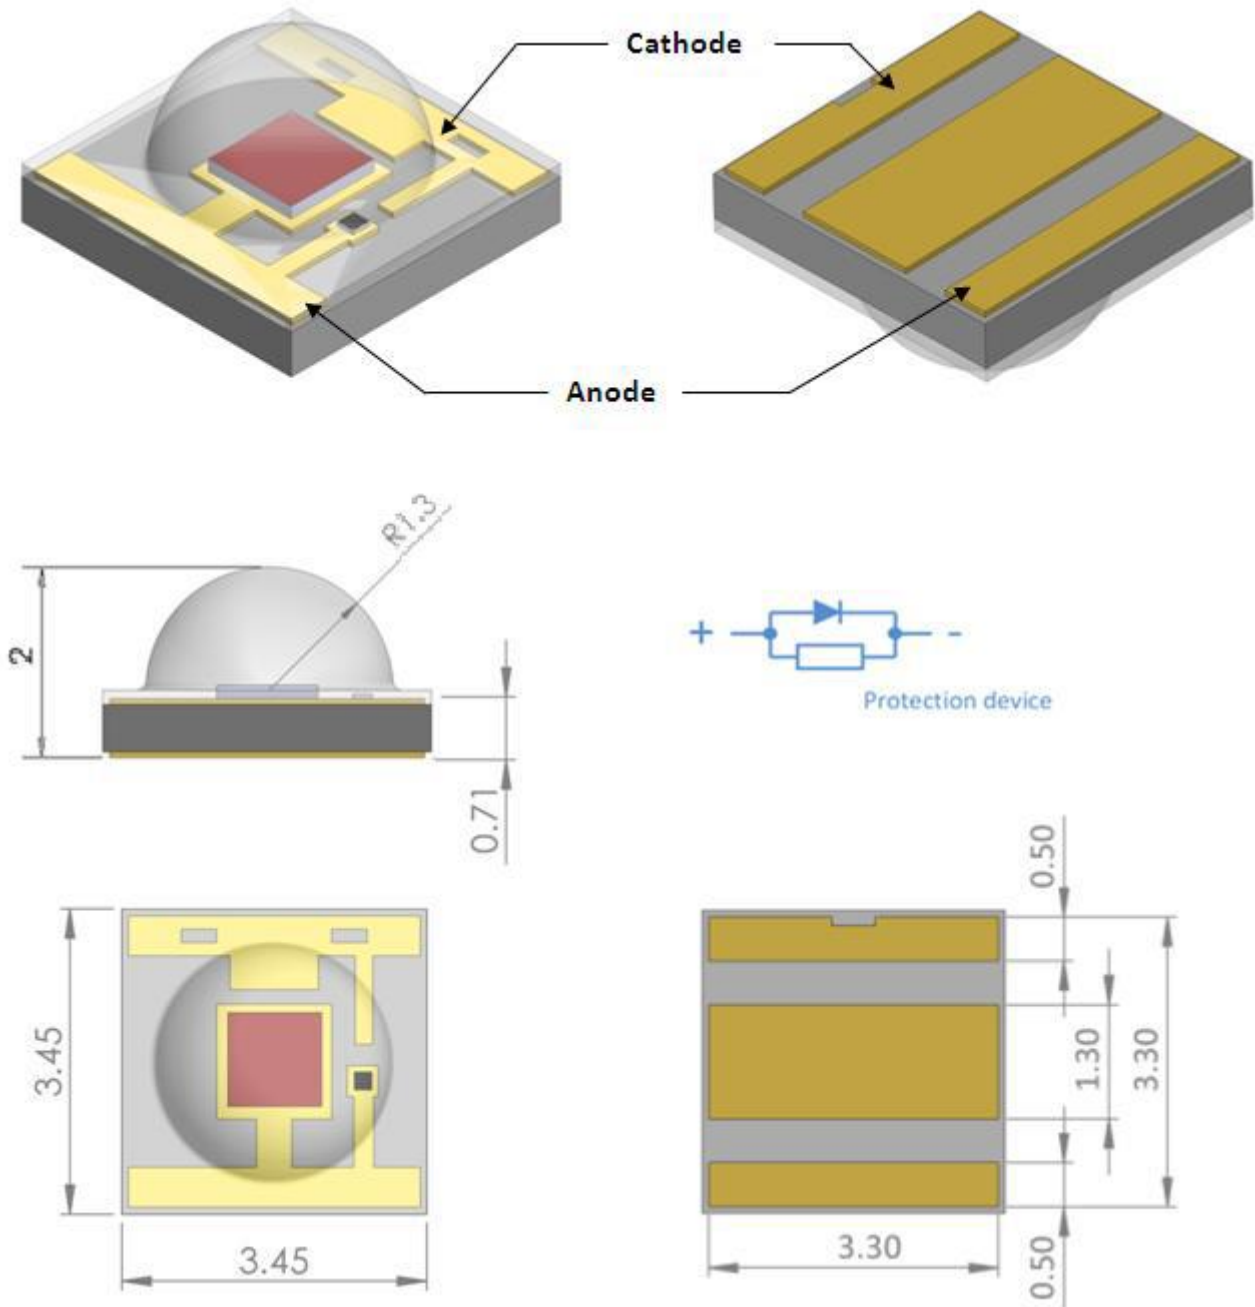

Notes:

1. Drawing is not to scale
2. All dimensions are in millimeter
3. Dimensions are $\pm 0.13\text{mm}$ unless otherwise indicated


N3535X-INAx (beam angle 90°)

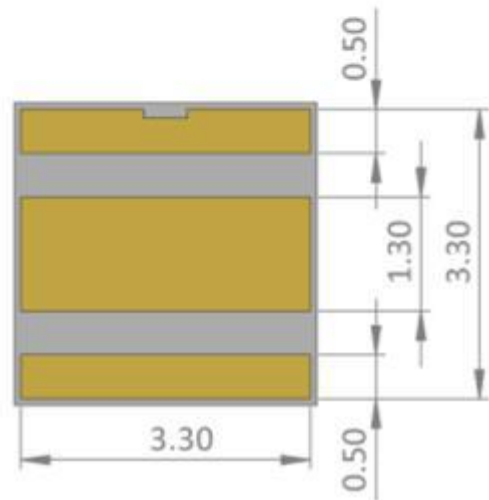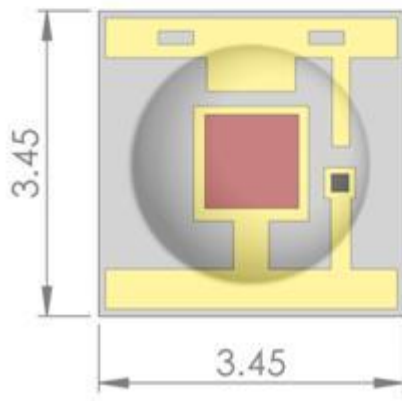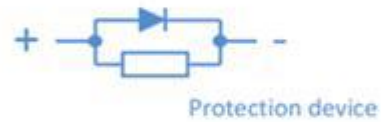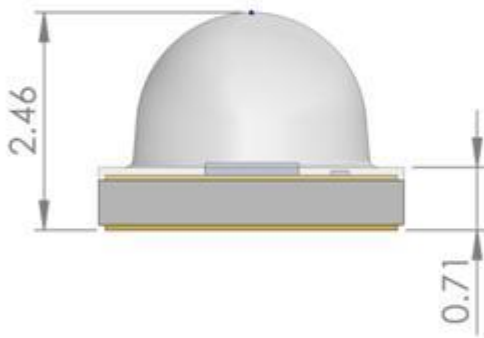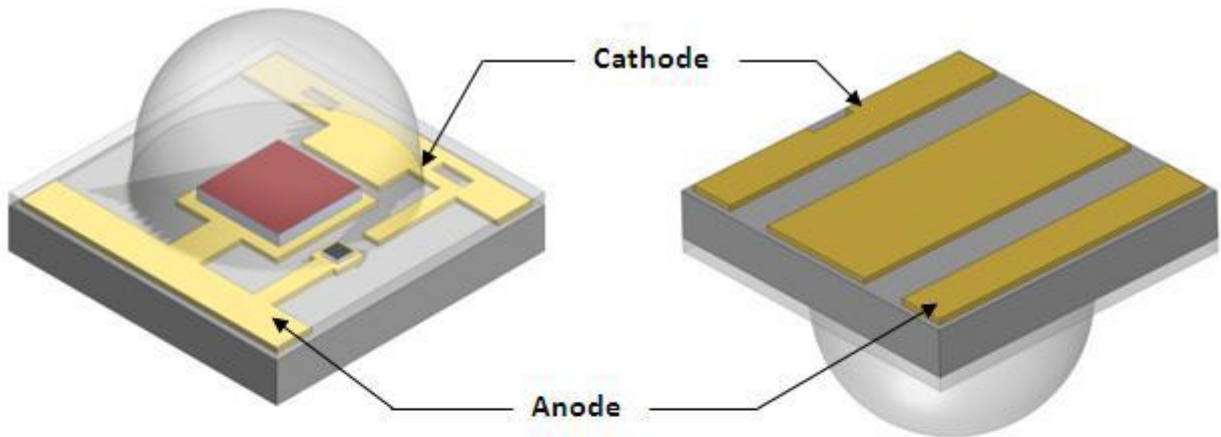

Notes:

1. Drawing is not to scale
2. All dimensions are in millimeter
3. Dimensions are $\pm 0.13\text{mm}$ unless otherwise indicated


N3535X-INFx (beam angle 65°)

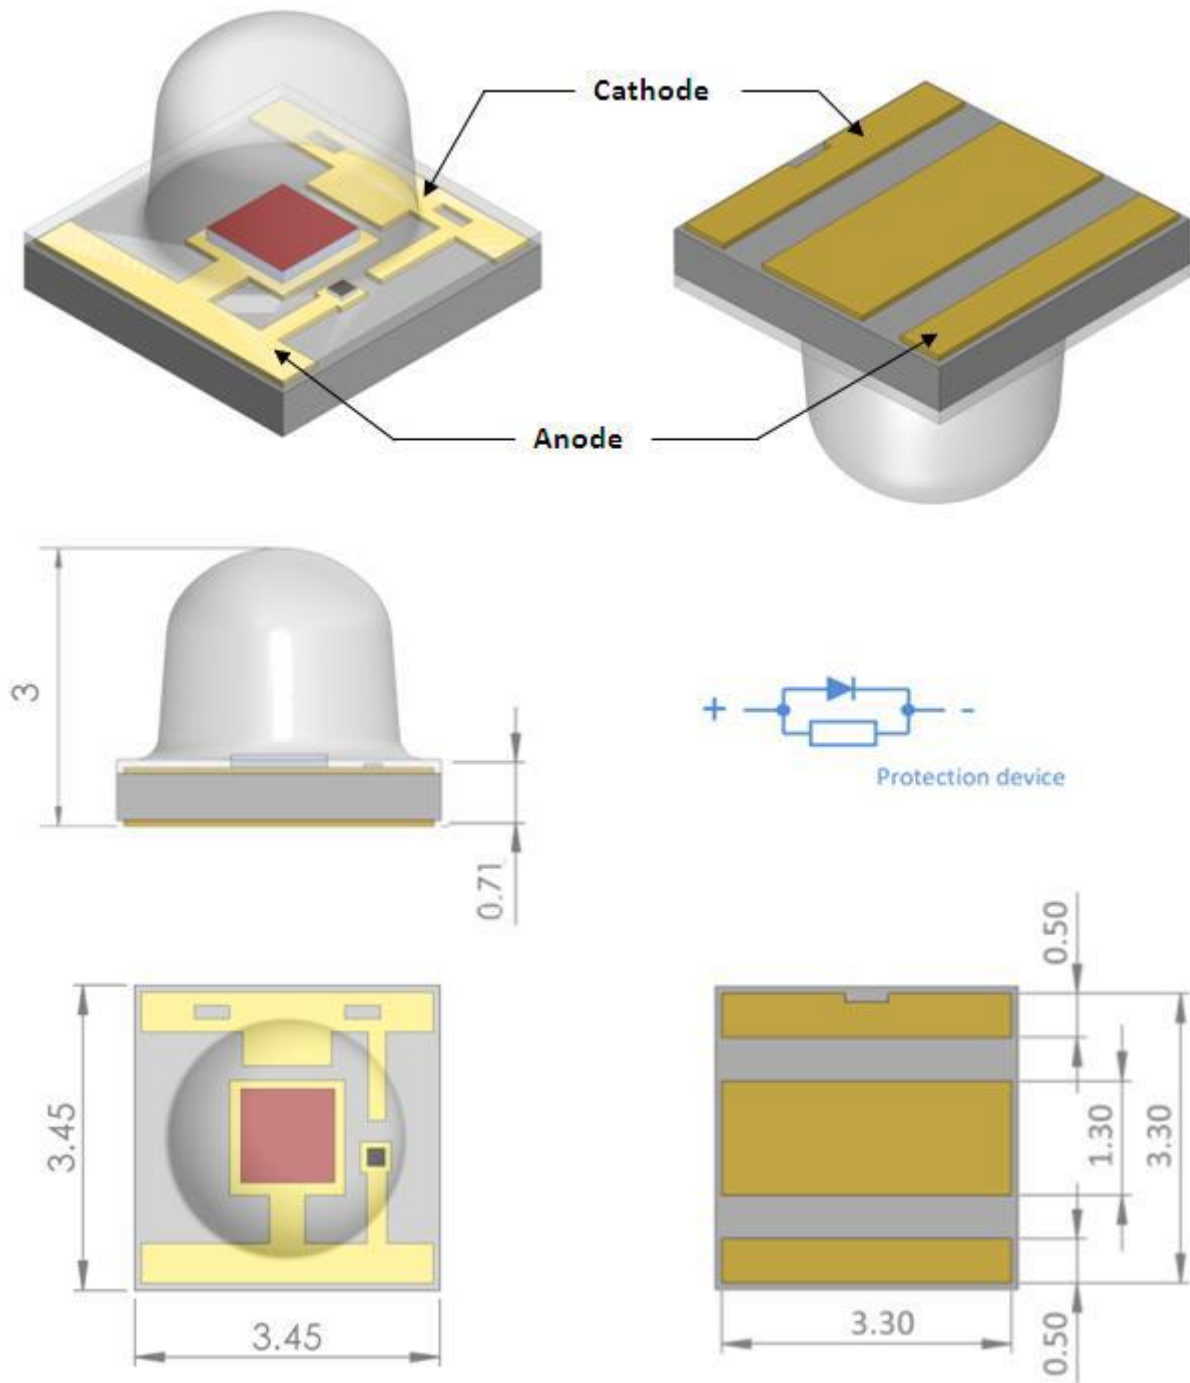

Notes:

1. Drawing is not to scale
2. All dimensions are in millimeter
3. Dimensions are $\pm 0.13\text{mm}$ unless otherwise indicated

N3535X-INSx (beam angle 30°)

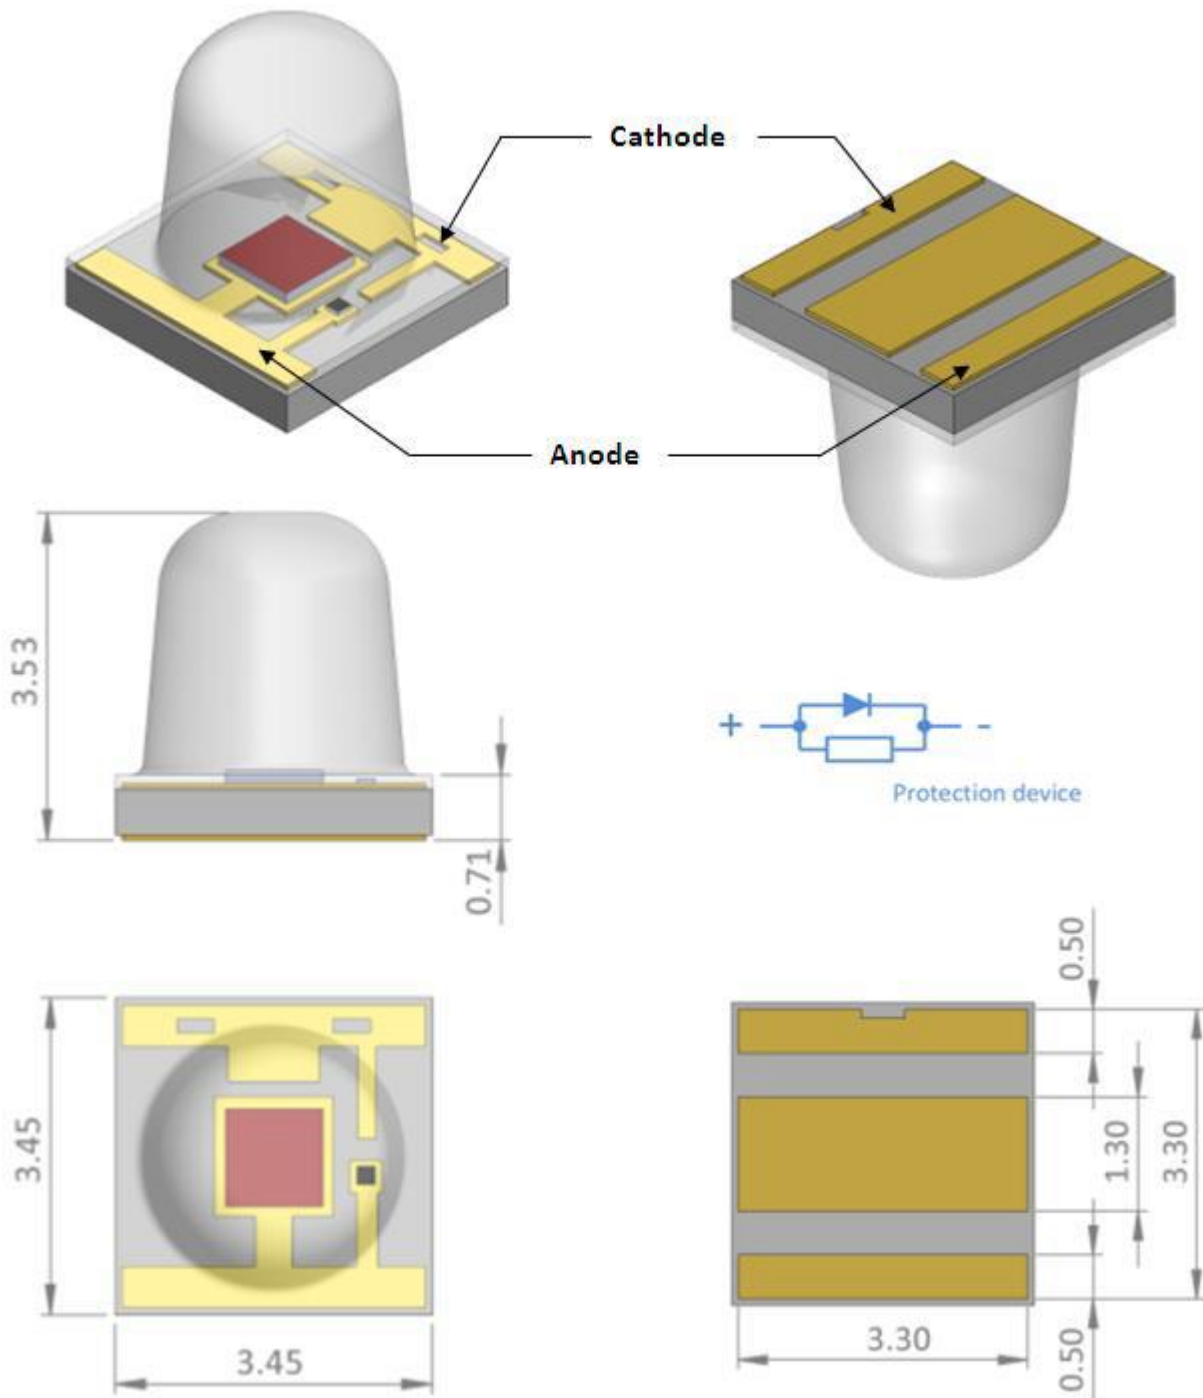


Notes:


4. Drawing is not to scale
5. All dimensions are in millimeter
6. Dimensions are $\pm 0.13\text{mm}$ unless otherwise indicated

Recommended Solder Pad Design

Recommended Soldering Pad Design

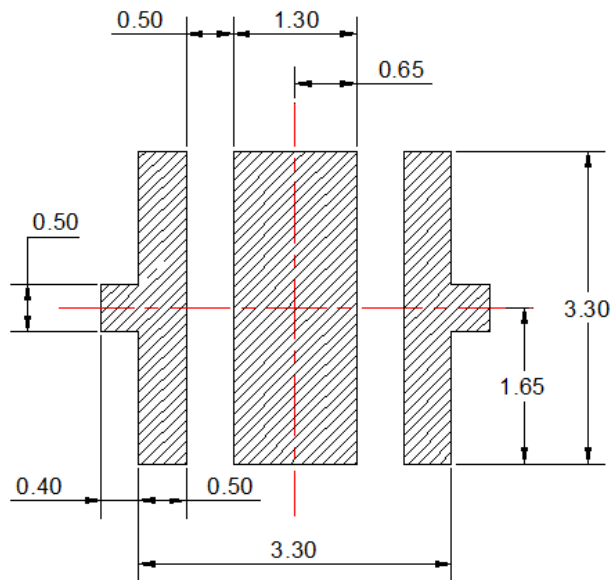


Recommended Stencil Pattern Design (Marked Area is Opening)

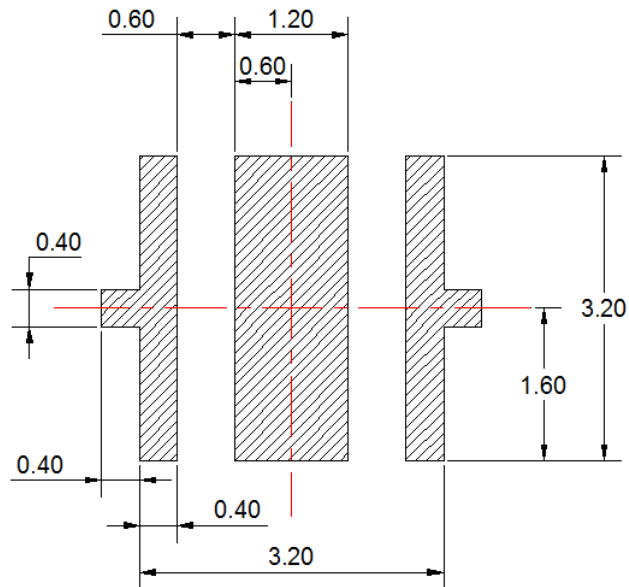

Notes:


1. Drawing is not to scale
2. All dimensions are in millimeter

Relative Spectral Power Distribution, $T_j=25\text{ }^{\circ}\text{C}$

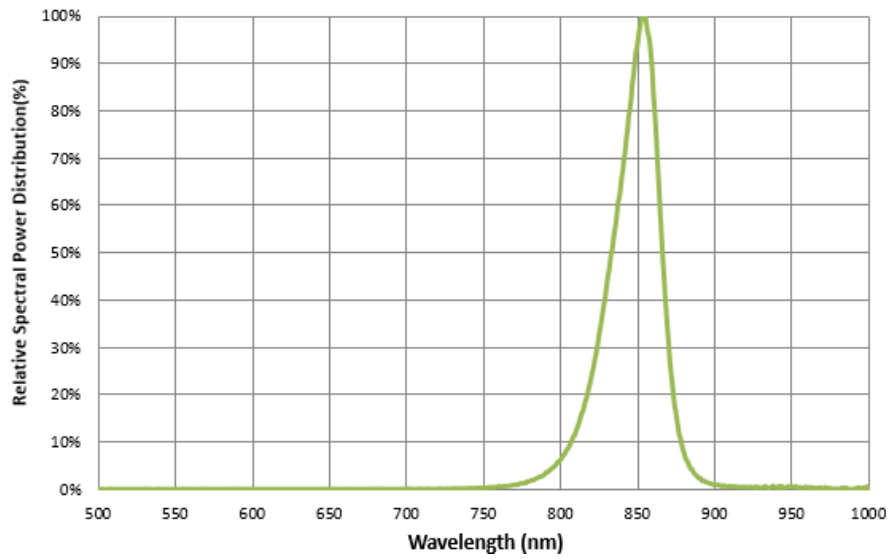


Typical Spatial Radiation Pattern, $T_j=25\text{ }^{\circ}\text{C}$


N3535X-INLx (beam angle 140°)

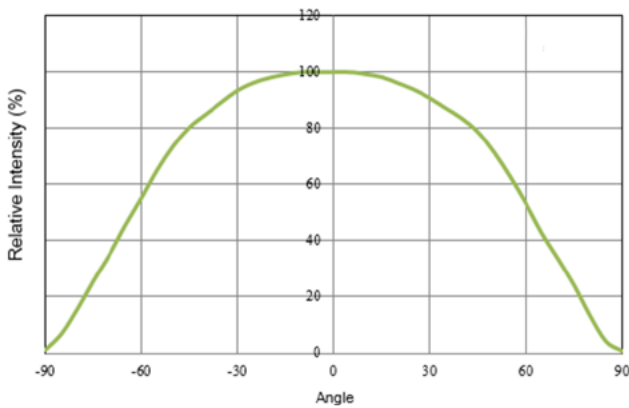


N3535X-INAx (beam angle 90°)

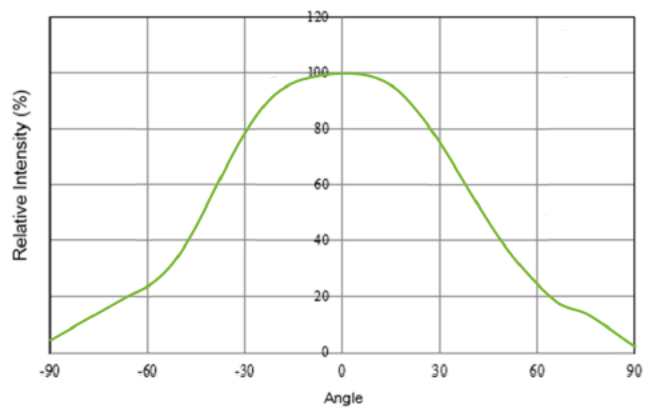


N3535X-INFx (beam angle 65°)

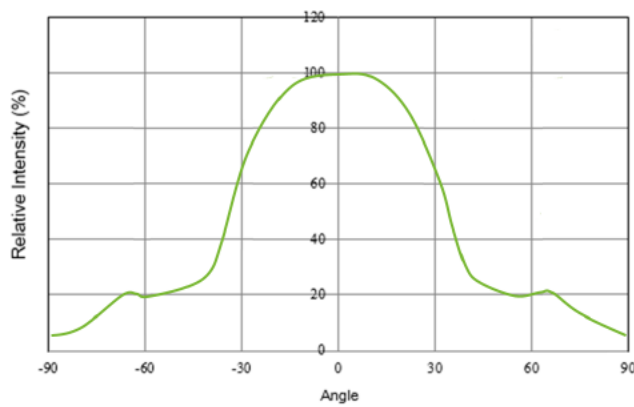

N3535X-INSx (beam angle 30°)

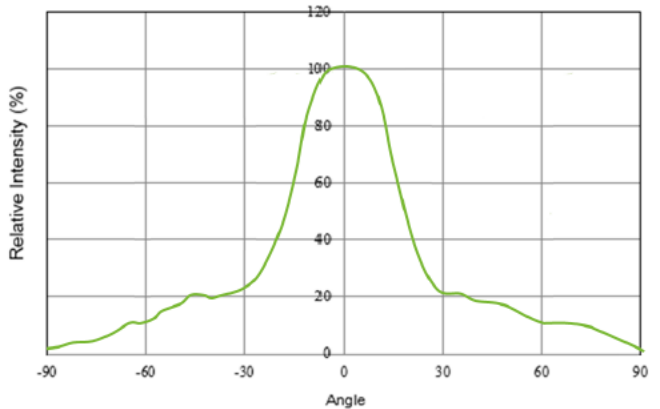


Typical Forward L-I Characteristics, $T_j=25\text{ }^{\circ}\text{C}$

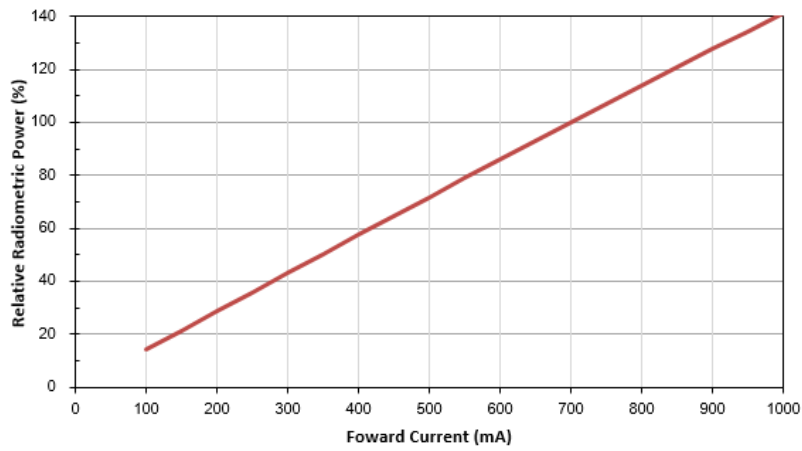


Typical Forward I-V Characteristics, $T_j=25\text{ }^{\circ}\text{C}$

D Series

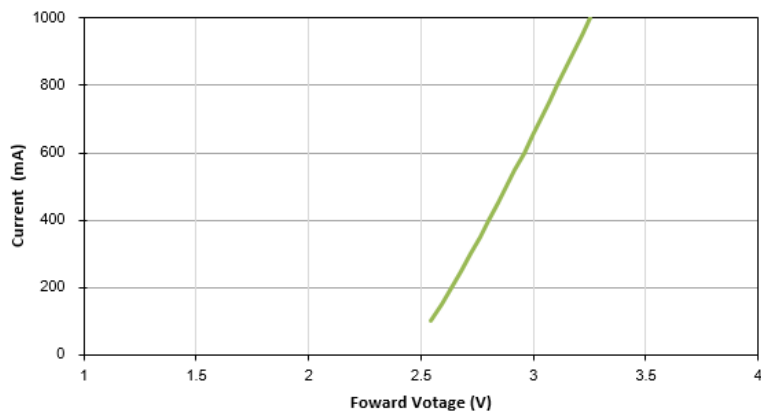


B Series

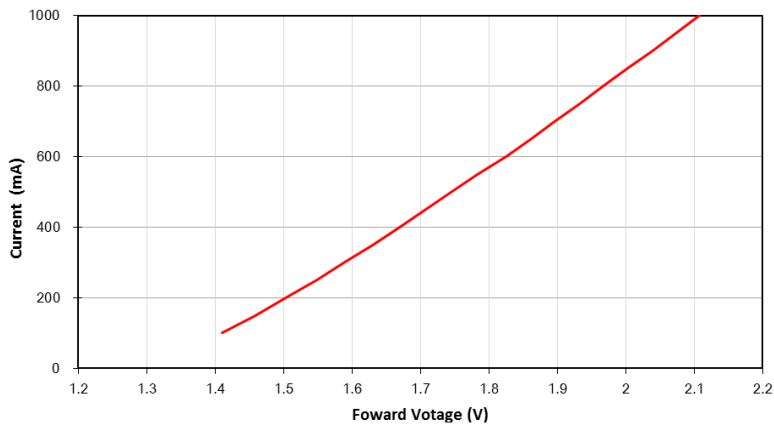

Recommended Soldering Profile


The LEDs can be soldered using the parameters listed below. As a general guideline, the users are suggested to follow the recommended soldering profile provided by the manufacturer of the solder paste. Although the recommended soldering conditions are specified in the list, reflow soldering at the lowest possible temperature is advised for the LEDs.

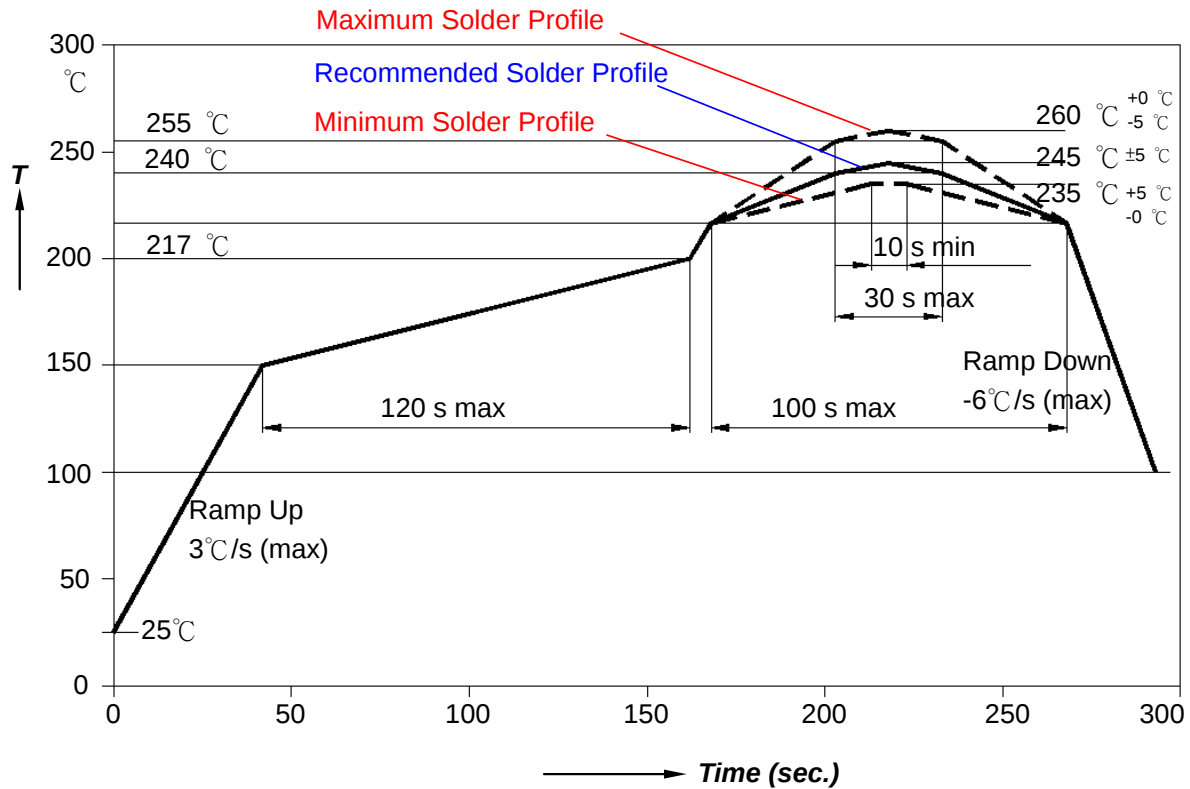

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Average Ramp-up Rate (Ts _{max} to Tp)	3°C/second max.	3°C/second max.
Preheat		
- Temperature Min(Ts _{min})	100°C	150°C
- Temperature Max(Ts _{max})	150°C	200°C
- Time(ts _{min} to ts _{max})	60-120 seconds	60-180 seconds
Time maintained above:		
- Temperature(T _L)	183°C	217°C
- Time(t _L)	60-150 seconds	60-150 seconds
Peak/classification Temperature(Tp)	215°C	260°C
Time within 5°C of actual Peak Temperature(tp)	10-30 seconds	20-40 seconds
Ramp-Down Rate	6°C/second max.	6°C/second max.
Time 25°C to Peak Temperature	6 minutes max.	8 minutes max.

Thermal Design

Thermal design of the end product is important. The thermal resistance between the junction and the solder point ($R_{\theta_{j-p}}$) and the end product should be designed to minimize the thermal resistance from the solder point to ambient in order to optimize the emitter life and optical characteristics. The maximum operation current is determined by the plot of Allowable Forward Current vs. Ambient Temperature.

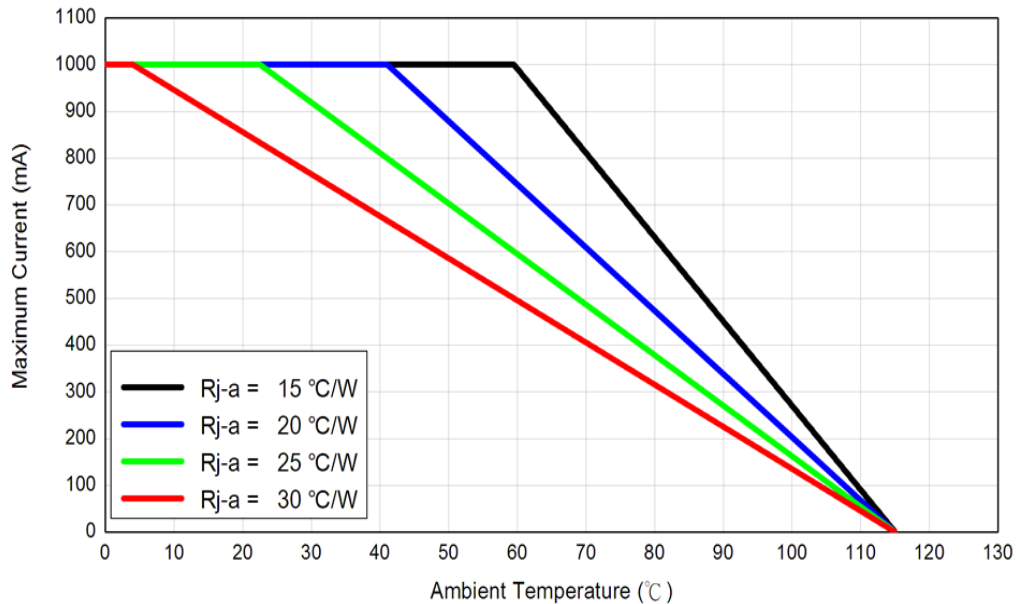

The junction temperature can be correlated to the thermal resistance between the junction and ambient (R_{ja}) by the following equation.

$$T_j = T_a + R_{ja} \cdot W$$

T_j : LED junction temperature


T_a : Ambient temperature

R_{ja} : Thermal resistance between the junction and ambient

W : Input power ($I_F \cdot V_F$)

Packing Information


N3535X-INLx series (beam angle 140°), Max QTY: 1000ea / roll

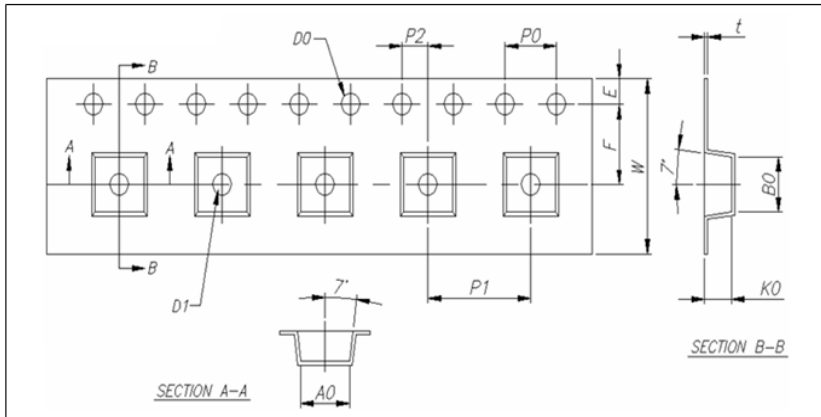

Item	Specification	Tol.(+/-)
W	12.00	±0.20
E	1.75	±0.10
F	5.50	±0.05
D0	1.50	+0.10, -0
D1	1.50	±0.10
P0	4.00	±0.10
P1	8.00	±0.10
P2	2.00	±0.10
P0X10	40.00	±0.20

Item	Specification	Tol.(+/-)
t	0.25	±0.05
A0	3.80	±0.10
B0	3.80	±0.10
K0	2.20	±0.10


N3535X-INAx series (beam angle 90°), Max QTY: 500ea / roll

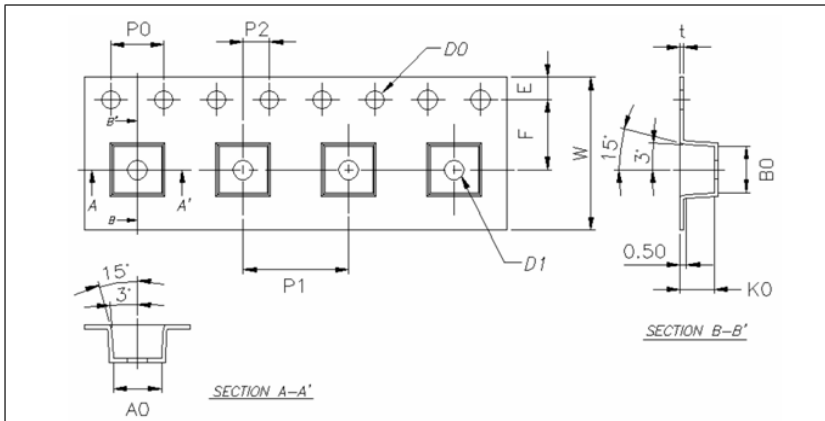

Item	Specification	Tol.(+/-)
W	12.00	±0.30
E	1.75	±0.10
F	5.50	±0.05
D0	1.50	+0.10, -0
D1	1.50	+0.10, -0
P0	4.00	±0.10
P1	8.00	±0.10
P2	2.00	±0.05
P0X10	40.00	±0.20


Item	Specification	Tol.(+/-)
t	0.30	±0.05
A0	3.65	±0.10
B0	3.65	±0.10
K0	2.56	±0.10

N3535X-INFx series (beam angle 65°), Max QTY: 500ea / roll


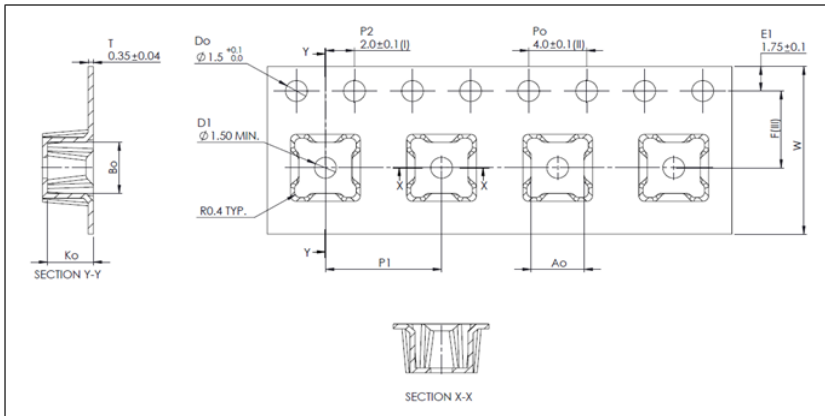


Item	Specification	Tol.(+/-)
A0	3.65	±0.10
B0	3.65	±0.10
K0	3.15	±0.10
F	5.50	±0.10
P1	8.00	±0.10
W	12.00	±0.30

N3535X-INSx series (beam angle 30°), Max QTY: 500ea / roll

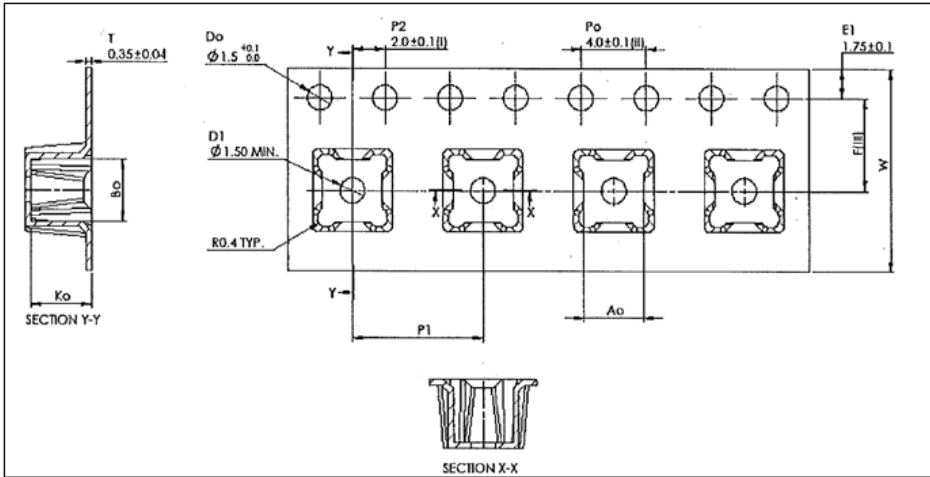

Item	Specification	Tol.(+/-)
A0	3.65	±0.10
B0	3.65	±0.10
K0	3.70	±0.10
F	5.50	±0.10
P1	8.00	±0.10
W	12.00	±0.30

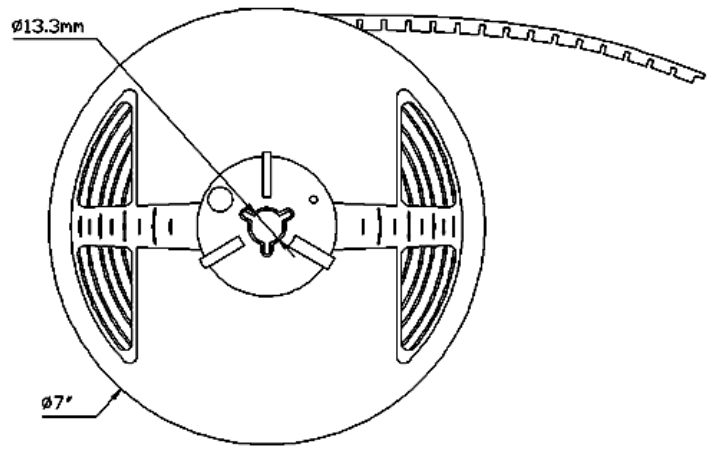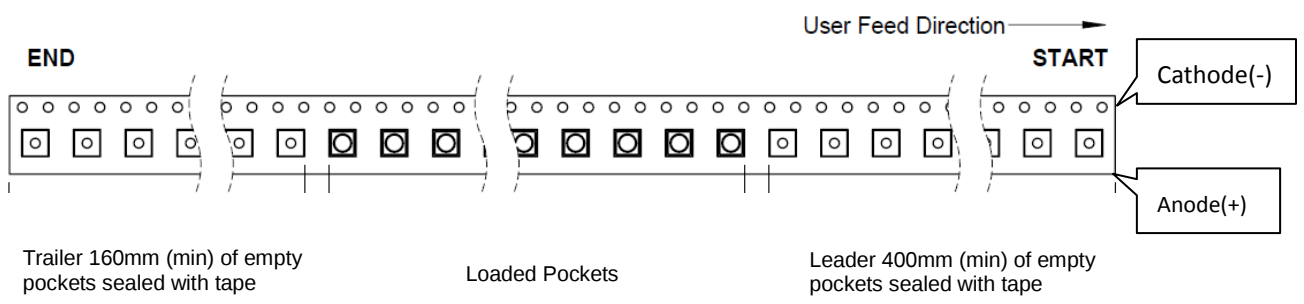

Note:
All dimensions are in millimeter.

About Us

TSLC Corporation is devoted to developing high-density and multi-size emitters with powerful output to satisfy the needs of every customer.

TSLC Corporation is the leader in LED solutions. Unlimited design flexibility for interior and exterior spaces with high-end lighting effect; energy-efficient for UV curing to improve the quality of medical care; horticulture solutions create a better environment for everyone; high-intensity rotatable lightings for the entertainment industry, TSLC is always there for your lighting needs.

For further company or product information, please visit us at www.tslc.com.tw or please contact sales@tslc.com.tw.



www.tslc.com.tw

ASIA PACIFIC

1F, No. 11, Ke Jung Rd.

Chu-Nan Site

Hsinchu Science Park

Chu-Nan 350, Miao-Li City

Taiwan, ROC

Tel: +886-37-587098

Fax: +886-37-587099

sales@tslc.com.tw

